



Transmission shaft

Operator safety

To avoid accidents and personal injuries, note the following recommended precautions and safe operation practices.

Always STOP ENGINE before attaching the transmission shaft to tractor P.T.O. - most tractor P.T.O. shafts can be rotated by hand to facilitate spline alignment, when engine is stopped.

When attaching the shaft, make sure that the snap lock is FULLY ENGAGED - push and pull shaft until it locks.

WARNING: ROTATING TRANSMISSION SHAFTS WITHOUT PROTECTION GUARDS ARE FATAL.

Always keep protection guards and chains intact and make sure that it covers all rotating parts, including CV-joints at each end of the shaft. Do not use without protection guard.

Do not touch or stand on the transmission shaft when it is rotating - safety distance: 1.5 meter.

Prevent protection guards from rotating by attaching the chains allowing sufficient slack for turns.



Make sure that protection guards around tractor P.T.O. and implement shaft is intact.

Always STOP ENGINE and remove the ignition key before carrying out maintenance or repairs to the transmission shaft or implement.

Installation of transmission shaft

Initial installation of the shaft is done as follows:

1. Attach sprayer to tractor and set sprayer in the position with **shortest** distance between the tractor and sprayer pump P.T.O. shafts.
2. Stop engine and remove ignition key.

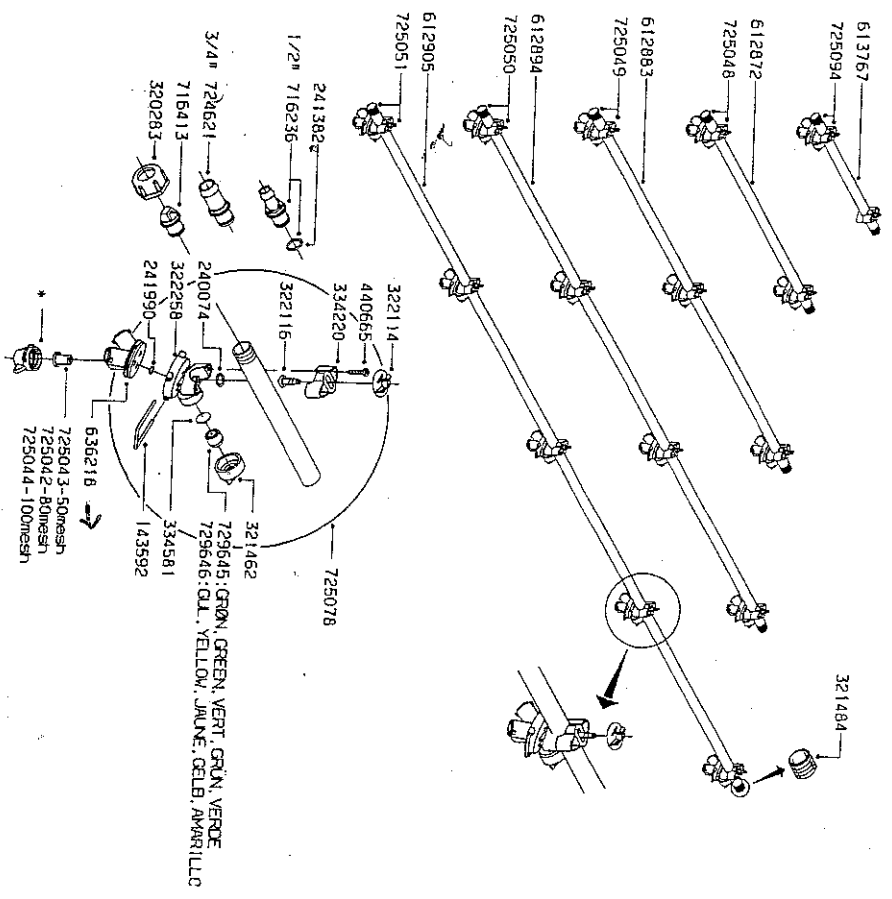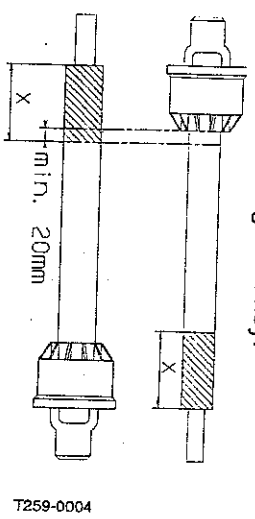

*	FAVRE	COLOR	COLOR	FAVRE	COLOR
371469	S4110-08	VIOLET	VIOLET	VIOLETT	VIOLETTA
371470	S4110-10	BROWN	BROWN	BRAUN	MARRON
371471	S4110-12	GREEN	GREEN	VERDE	VERDE
371472	S4110-14	ORANGE	ORANGE	ORANGE	ANARANJADO
371473	S4110-16	RED	RED	ROJO	ROJO
371474	S4110-18	WHITE	WHITE	BLANC	BLANCO
371475	S4110-20	GREEN	GREEN	VERT	VERDE
371476	S4110-24	TURKIS	TURQUOISE BLUE	TURKIS	AZUL TURQUOI
371477	S4110-30	BLA	BLUE	BLAU	AZUL
371478	S4110-36	GRA	GREY	GRIS	GRIS
371479	S4110-44	ELFENBEIN	IVORY	ELFENBEIN	WASSERFALL

Boom tube TRIPLET SNAP-FIT